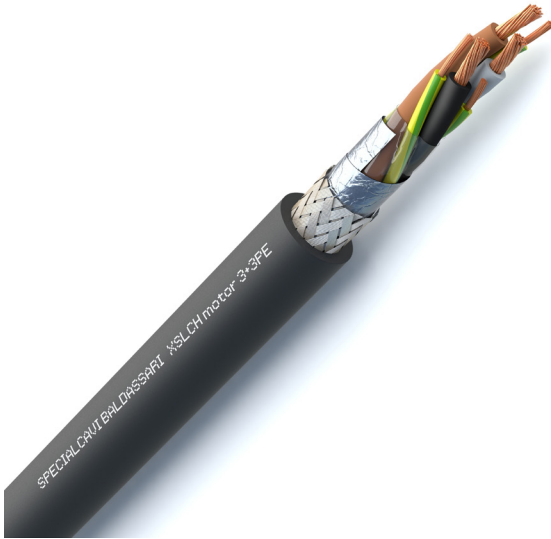


**XSLCH-J MOTOR | 3+3PE**

Marking: <meters> CE 0987 SPECIALCAVI BALDASSARI XSLCH-J <formation> IEC 60332-3-24 <lot> <year> B2CA-S1A,D0,A1

**MANUFACTURING CHARACTERISTICS****Conductor:**

Flexible bare copper, class 5

Insulation:

Cross-linked LSZH compound

Stranding:

Cores stranded in concentric layers

Wrapping and protection:

Overall polyester tape

Shield:*1st shield:*

Overall aluminium/polyester tape

2nd shield:

Overall tinned copper braid

Outer sheath:

LSZH thermoplastic compound

Colours:*Cores identification:*

Brown + Black + Grey + 3 x Green/Yellow

Outer sheath colour:

Black (based on RAL 9005)

ELECTRICAL CHARACTERISTICS**Nominal operating voltage:** 0.6/1kV**Maximum operating voltage:** 1.8kV D.C. and 1.2kV A.C.**Testing voltage:** 4000V**APPLICATIONS****Cable conforms to the requirements in the Construction Products Regulations (CPR EU 305/11), aimed at limiting the production and diffusion of fire and smoke.**

Shielded LSZH cable characterized by its special construction, used to power motors with frequency converters when full electromagnetic compatibility (EMC) is required.

The symmetrical construction of the cable (3 + 3PE) ensures the symmetry of the supply voltages on the motor terminals. The cable, made entirely of halogen-free materials, does not emit harmful substances in the event of a fire.

Suitable for both static and dynamic connections (occasional movement) in industrial plants, process lines and machines operating in dry or damp environments.

If stored/placed outdoors, the cable must be protected from UV rays.

Direct or indirect underground laying is permitted (presence of water condition AD7).

STANDARDS

IEC 60228

IEC 60332-3-24 Cat.C

REACTION TO FIRE CLASS**EN 50575:2016 B2_{ca} - s1a, d0, a1****TEMPERATURES****Minimum working temperature:**

- Fixed laying -40°C
- Occasional mobile laying w/o stress -5°C

Maximum working temperature:

- Fixed laying +90°C
- Occasional mobile laying w/o stress +90°C

Maximum short circuit temperature: +250°C**LAYING CONDITIONS**

Minimum installation temperature -5°C

Min. bending radius:
d8 (fixed laying)
d15 (occasional mobile laying)Max tensile stress:
50N/mm² (during installation)
15N/mm² (static stress)

Fixed laying



Occasional mobile laying w/o stress



In open air



In duct or cable tray



In buried trough



Buried with protection



In buried duct



Directly buried



The cable stored/placed outside must be protected from UV rays

ON REQUEST

- Customized cores identification/outer sheath colours



XSLCH-J MOTOR | 3+3PE

PART NUMBER	FORMATION	OUTER DIAMETER ¹	WEIGHT ¹	MAX PHASE CONDUCTOR RESISTANCE AT 20°C	MAX GROUND CONDUCTOR RESISTANCE AT 20°C
[n°]	[n° x mm ²]	[mm]	[kg/km]	[Ohm/km]	[Ohm/km]
*2CZUK15003	3 X 1.50 + 3 G 0.25	10.3	167	13.30	75.00
*2CZUK25003	3 X 2.50 + 3 G 0.50	11.4	216	7.98	39.00
*2CZUK40003	3 X 4.00 + 3 G 0.75	13.3	311	4.95	26.00
*2CZUK60003	3 X 6.00 + 3 G 1.00	14.5	397	3.30	19.50
*2CZUK100003	3 X 10.00 + 3 G 1.50	17.1	586	1.91	13.30
*2CZUK160003	3 X 16.00 + 3 G 2.50	19.6	835	1.21	7.98
*2CZUK250003	3 X 25.00 + 3 G 4.00	23.0	1230	0.780	4.95
*2CZUK350003	3 X 35.00 + 3 G 6.00	25.8	1644	0.554	3.30
*2CZUK500003	3 X 50.00 + 3 G 10.00	30.3	2324	0.386	1.91
*2CZUK700003	3 X 70.00 + 3 G 10.00	34.5	3063	0.272	1.91
*2CZUK950003	3 X 95.00 + 3 G 16.00	38.8	4126	0.206	1.21
*2CZUK1200003	3 X 120.00 + 3 G 16.00	44.1	5071	0.161	1.21
*2CZUK1500003	3 X 150.00 + 3 G 25.00	47.6	6362	0.129	0.780
*2CZUK1850003	3 X 185.00 + 3 G 35.00	52.8	7928	0.106	0.554
*2CZUK2400003	3 X 240.00 + 3 G 42.50	60.3	10161	0.0801	0.457

* According to in-stock availability, cable which must be produced on request and minimum quantity

¹ Unless otherwise specified, the values for weight and diameter are indicative.

Note: other values, if available and released for publication, are available on request.